


## VALVE REGULATED LEAD-ACID RECHARGEABLE BATTERY

**FL12170**

**(12V17Ah/20hr)**

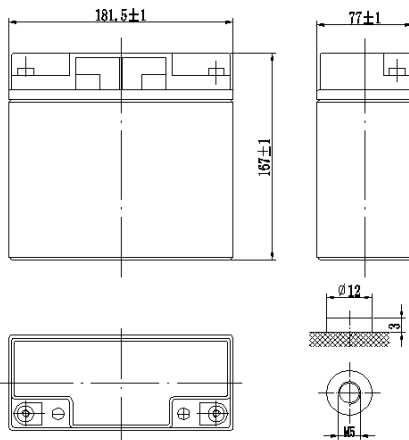

### FL Series

Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

### Application

- Alarm System
- Cable Television
- Power tools
- Emergency Power System
- Security System
- Medical Equipment
- UPS
- Communication Equipment
- Control Equipment
- Toys

### General Features

- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof .
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

### CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

### TECHNOLOGY PARAMETER

Battery model	FL12170			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR(0.85A, 10.5V)	10HR(1.65A, 10.5V)	5HR(2.87A, 10.5V)	1HR(11.4A, 9.60V)
	17Ah	16.5Ah	14.35Ah	11.4Ah
Dimensions	Length	Width	Height	Total Height
	181.5±1mm	77±1mm	167±1mm	167±1mm
Approx. weight (±3%)	5.05Kg (11.13 lbs)			
Internal resistance	Full charged at 25°C: Approx. 16mOhms			
Self discharge	3% of capacity declined per month at 25°C (average)			
Capacity Affected by Temp.(20HR)	40 °C	25 °C	0 °C	-15 °C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle use		Float use	
	14.5-14.9V(-30mV/°C), max. Current: 5.1A		13.6-13.8V(-20mV/°C)	

## VALVE REGULATED LEAD-ACID RECHARGEABLE BATTERY

### FL12170 (12V17Ah/20hr)

Constant current discharge ratings-amperes at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	63.9	44.7	34.0	19.2	11.4	4.79	3.13	1.73	0.89
1.65V	60.7	42.7	32.4	18.4	11.2	4.64	3.04	1.70	0.87
1.70V	57.1	40.3	30.7	17.6	11.0	4.48	2.96	1.67	0.86
1.75V	53.5	37.9	29.0	16.7	10.5	4.29	2.87	1.65	0.85
1.80V	49.9	35.9	27.4	15.9	9.98	4.10	2.78	1.61	0.83

Constant power discharge ratings-watts at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	118	82.7	63.3	35.8	21.5	9.06	5.95	3.31	1.71
1.65V	112	78.6	59.9	34.2	21.0	8.72	5.75	3.23	1.67
1.70V	104	73.8	56.5	32.6	20.4	8.39	5.56	3.15	1.64
1.75V	97.3	69.0	53.2	30.8	19.4	7.98	5.37	3.10	1.61
1.80V	89.8	64.6	49.6	28.9	18.3	7.54	5.15	3.00	1.56

