


VALVE REGULATED LEAD-ACID RECHARGEABLE BATTERY

FL1208S-P

(12V0.8Ah/20hr)

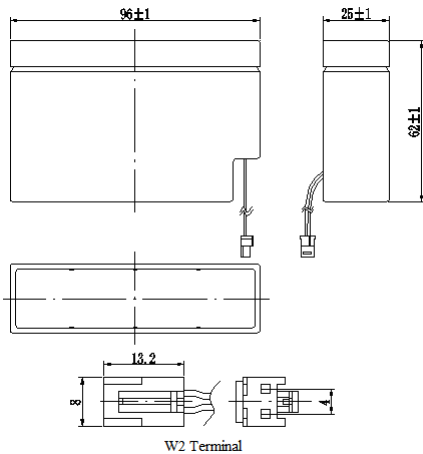

FL Series

FL Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

Application

- Alarm System
- Medical Equipment
- Cable Television
- UPS
- Power tools
- Communication Equipment
- Emergency Power System
- Control Equipment
- Security System
- Toys

General Features

- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof .
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Plug	Fiberglass	Sulfuric acid

TECHNOLOGY PARAMETER

Battery model	FL1208S-P			
Designed Floating Life	5 Years			
Capacity (25 °C)	20HR(0.04A, 10.5V)	10HR(0.073A, 10.5V)	5HR(0.11A, 10.5V)	1HR(0.46A, 9.60V)
	0.8Ah	0.73Ah	0.55Ah	0.46Ah
Dimensions	Length	Width	Height	Total Height
	96±1mm	25±1mm	62±1mm	62±1mm
Approx. weight (±3%)	0.35Kg (0.77 lbs)			
Internal resistance	Full charged at 25°C: Approx. 220mOhms			
Self discharge	3% of capacity declined per month at 25°C (average)			
Capacity Affected by Temp.(20HR)	40 °C	25 °C	0 °C	-15 °C
	102%	100%	85%	65%
Charge Voltage (25 °C)	Cycle use		Float use	
	14.5-14.9V(-30mV/°C), max. Current: 0.24A		13.6-13.8V(-20mV/°C)	

VALVE REGULATED LEAD-ACID RECHARGEABLE BATTERY

FL1208S-P (12V0.8Ah/20hr)

Constant current discharge ratings-amperes at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	2.67	1.87	1.45	0.82	0.46	0.19	0.13	0.076	0.042
1.65V	2.53	1.78	1.38	0.78	0.45	0.19	0.12	0.075	0.042
1.70V	2.38	1.68	1.31	0.75	0.44	0.18	0.12	0.073	0.041
1.75V	2.23	1.58	1.24	0.71	0.42	0.17	0.11	0.073	0.040
1.80V	2.08	1.50	1.17	0.68	0.40	0.16	0.11	0.071	0.039

Constant power discharge ratings-watts at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	4.93	3.45	2.70	1.53	0.86	0.36	0.24	0.15	0.08
1.65V	4.66	3.28	2.55	1.46	0.84	0.35	0.23	0.14	0.08
1.70V	4.36	3.08	2.41	1.39	0.81	0.34	0.22	0.14	0.08
1.75V	4.06	2.88	2.26	1.31	0.78	0.32	0.21	0.14	0.08
1.80V	3.75	2.70	2.11	1.23	0.73	0.30	0.21	0.13	0.07

