


User's Manual

Product Features

26650 Diving flashlight
 LED: L2 LED
 Max output: 800 lumen
 Smart constant current drive circuit
 Aviation aluminum vacuum electroplating reflecting system
 Max luminous flux: 18500cd
 Max beam distance: 332m
 Precise temperature control system; monitor working temperature;
 adjust brightness reasonably to performance best
 Friendly red and green battery indicator
 Long run time: up to 80h
 Smart model control; one press to active super bright
 Super transparent toughened lens
 Aviation aluminum provided
 Military grade anodization processing
 Waterproof: (underwater 80m)
 1.0 impact resistance

The Usage

Please refer to the picture: insert
 1 X26650 or 1 X 18650 Lithium battery
 Notice: when battery inserted, red and
 blue LED indicates battery power,
 At full power, blue LED light is on
 Insufficient battery power, red LED is on
 for prompting the user to replace the
 battery.

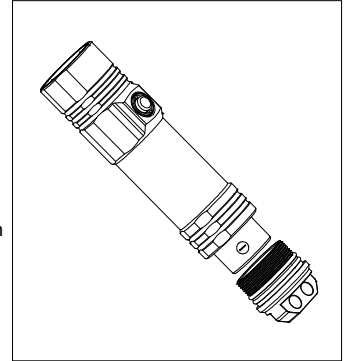

Operation

1. Click will be low-high-middle-OFF.
3. In any state, Long press to enter the flash file directly

ENGLISH MANUAL

Size

Length: 134mm
 Head diameter: 36.0mm
 Tail diameter: 35.5mm
 Weight: 162g (without battery)

Accessories

lanyard; spare O-ring; User's Manual
 18650 transfer tube

Battery

	size	nominal voltage	available or not
26650 Lithium battery	26650	3.7V	recommend(available&chargeable)
26650 Lithium battery	26650	3.7V	recommend(available&chargeable)

Note: For long time no using, please back out to prolong the lift time of flashlight

Temperature Control Module

High end temperature control module, monitor temperature around flashlight at any time. Adjust the brightness output automatically to reach to the best working state.

ANSI Specificaitons

FL1 STANDARD	High	Middle	Low	Flash
LUMENS	800 lumen	300 lumen	50 lumen	800 lumen
BATTERY	6h	12h	80h	8h
BEAM	332m (Beam Distance)			
INTENSITY	18500cd(Peak Bean Intensity)			
IMPACT	1.0m(Impact Resistant)			
WATER	80m			

Note: above specifications refer to international flashlight standard ANSI/NEMA F11 testing method 26650 5000mAh battery used during the two tests. Different battery and surroundings may make a difference to above statistics.

Be well-preserved

1. Do not use grease refine from petroleum to touch O-ring or it will be damaged.
2. Clean the thread with clean cloth twice a year and use lubricating grease.

Warranty

warranty its products to be free from defects in materials and workmanship. Within 15 days of receipt, any defective lights will be offered repair or replace, at its option and without charge, any product or part which is found to be defected under normal use and service with 36 months counting from the date of purchasing with proof of purchase, such repair or replacement shall be the purchaser's sole and exclusive remedy under this warranty. This warranty does not cover normal maintenance and service and does not apply to any products or parts which have been subject to modification, misuse, negligence, accident, improper maintenance or repair by any other than .

As to those exceeded 36 months of the purchase date, will still provide with warranty service. Labor is free but cost of parts will be charged. This warranty covers parts and labor only as specified above. Freight and transit costs are the responsibility of the user/owner, not the factory or dealer.